

ZHEJIANG HANGCHA IMP. & EXP. CO., LTD.

**Factory site:** 666 Xiangfu Road, Hangzhou, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755 Fax: +86-571-88926789 88132890

sales@hcforklift.com www.hcforklift.com





Download "Hangcha Forklift" App






HANGCHA trucks confor to the European Safety Requirements.

HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.

# A Series Storage Assist Vehicle

with capacity of 215kg







HANGCHA

# **A SERIES STORAGE ASSIST VEHICLE**

With a comprehensive safety protection system, excellent ergonomic design, an advanced control system and excellent performance, the vehicle is reliable, stable, comfortable and safe, and may be used for picking, transportation and other operations in narrow, low environments such as small warehouses, supermarkets, laboratories, etc.





SUPERMARKETS



LABORATORIES

## Reliability

- / With a high-strength steel frame structure, the vehicle frame is robust and reliable.
- / All wires and cables have reliable protection, which greatly improves the reliability of the electrical system.
- / Switches, connectors, instruments and other key parts are all of leading international brands and have excellent performance and reliable quality.


## **High performance**

- / A green and environmentally friendly, efficient energy-saving CATL lithium battery is provided for the standard configuration./ An integrated charger enables easy and quick charging.
- / For the standard configuration a load tray and platform tray that can be lifted manually/electrically are provided to enable higher picking and transportation efficiency.
- / The maintenance-free brushless AC walking motor has excellent acceleration performance and low heat generation.





The advanced AC control system performs accurate, stable and efficient control. The CANBUS bus structure makes the communication of the vehicle faster and more reliable.

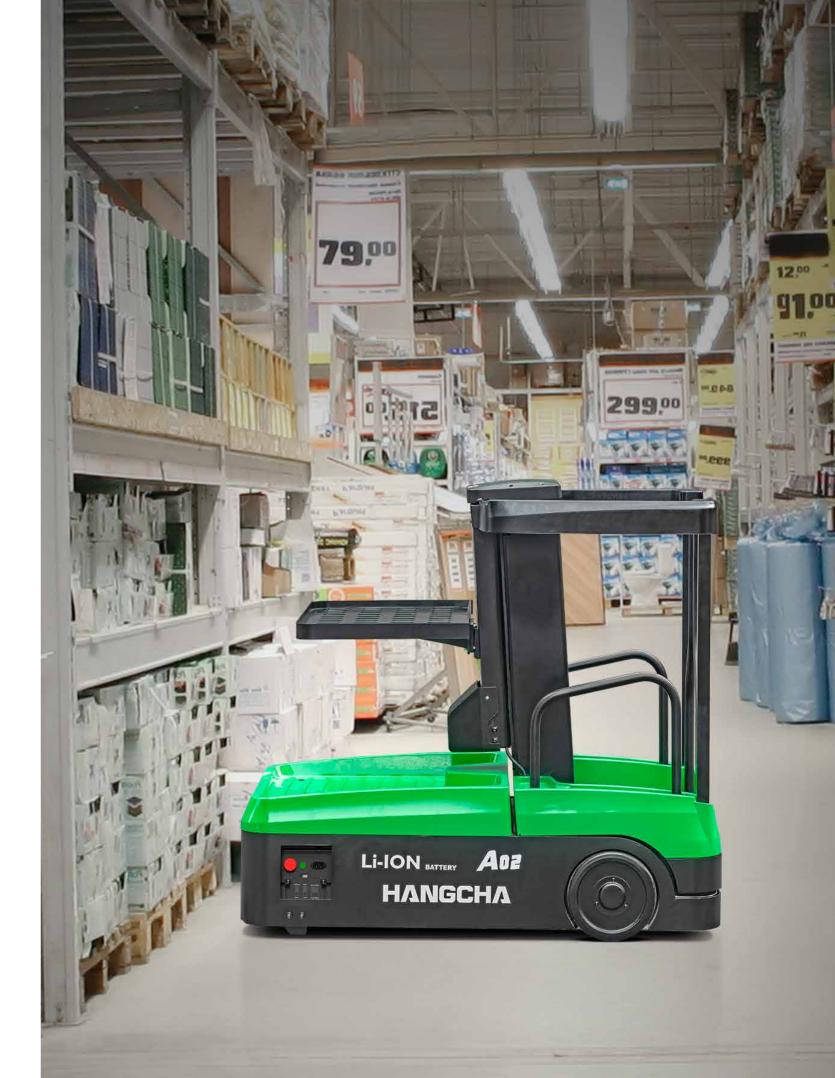

# SIMPLE/SOLID/ **SMART**

# Comfort

LI-ION SATTERY

**ADDED SECURITY.** THE SCIENCE OF DESIGN

- / The mast ascending and descending buffering function offers more comfort.
- / An optional tray that can be lifted electrically can be operated easily, stably and comfortably.
- / Multi-layer pedal pads and door pads reduce operator fatigue.
- / For the standard configuration, multi-function instruments have multiple functions such as mode selection, wheel position display, etc., and can clearly display various information of the vehicle.





Right and left hand sensing



Front and rear flashing lights



## Safety

- / The right and left hand sensing and safety pedal ensure the operator is in the correct operating position.
- / For the standard configuration a tilt switch sensor and a door guardrail sensing switch are provided to improve the operation safety.
- / The driving speed is correlated with lifting height, the higher the lifting height, the lower the driving speed and the correspondingly smaller the acceleration.
- / The turning proportional deceleration function provided for the standard configuration ensures smooth and safe turning.
- / The manual emergency descending function can be performed at the rear of the vehicle.
- / With the operating platform bottom safety protection, front and rear flashing lights and other functions, the surrounding personnel can be alerted and protected, and the driving danger can be reduced.

## Maintenance

- / The maintenance-free brushless AC motor significantly reduces the operating cost.
- / The integrated battery display, timer and fault self-diagnosis gauge facilitate maintenance.
- / All components are placed at the front of the frame, so just open the hood, and then the vehicle can be repaired easily and quickly.



A lower operation panel is designed to enables the operations such as operation platform lifting, brake release, etc. to be performed outside the vehicle so as to facilitate vehicle maintenance.

## **Options**

- / Blue light / Front working light
- / Side roller
- / Electric lifting pallet
- / Back cushion



## A Series Storage Assist Vehicle Specification

uishing ark	1.1 1.2 1.5 1.9	Manufacturer Model Rated capacity on load tray Rated capacity on load deck	Q1(kg)	HANGCHA GROUP CO.,LTD. CJDO2-AMC1-M11 100
Distinguishing mark	1.5	Rated capacity on load tray Rated capacity on load deck		
			Q2(kg)	115
Weight	1.9	Rated capacity on standing platform	Q3(kg)	135
Weight		Wheelbase	y(mm)	1026
-	2.1	Service weight	kg	600
sis	3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane		polyurethane
Tyres/chassis	3.2	Tyre size,front	mm	Ø210×83
res/d	3.3	Tyre size, rear	mm	Ø280×60
Γ <sup>Δ</sup>	3.5	Wheels, number driving, caster/loading (x=drive wheels)		1x,/2
	4.2	Height,mast lowered	h1(mm)	1414
	4.4	Lift	h3(mm)	2995
s [	4.5	Height, mast extended	h4(mm)	4409
Dimensions	4.8	Seat height/standing height	h7(mm)	300
imer	4.19	Overall length	lı(mm)	1525
	4.21	Overall width	b1/b2(mm)	750/750
	4.31	Ground clearance, centre of wheelbase	m2(mm)	40
	4.35	Turning radius	Wa(mm)	1210
g	5.1	Travel speed,laden/unladen	km/h	8/8
e dai	5.2	Lift speed,laden/unladen	mm/s	260/300
nanc	5.3	Lowering speed,lade/unladen	mm/s	250/250
Performance data	5.7	Gradeability,laden/unladen	%	5
4	5.10	Service brake		Electromagnetic
ine	6.1	Drive motor rating S2 60 min	kw	0.65
-eng	6.2	Lift motor rating at S3 15 %	kw	2.2
Electric-engine	6.4	Battery voltage/nominal capacity K3, Maintenance free	V/Ah	24/125
Ele		Type of battery		Lithium
Addition data	10.7	Sound pressure level at the driver's seat	dB(A)	68

